

## Air Cooled Condensing Units



- Embraco aspera compressors - world renowned reliability
- Polyolester compressor lubricant
- Standard units (without accessories) are prewired to a terminal box
- Built for Australasian conditions

# R404A Low



5/8 1 1/2 hp

### CAPACITY (Watts) @ 38°C Ambient



MODEL	Nom. hp	Evaporating Temp °C									
		-40	-35	-30	-25	-23.3			-20	-15	-10
						Input W	Watts	RLA			
UT2155GK	5/8	220	315	425	550	520	601	2.8	700	865	1025
UT2168GK	3/4	305	415	545	700	655	755	3.5	860	1045	1255
UT2178GK	1.0	400	540	690	870	770	940	3.9	1070	1290	1545
UNJ2192GK	1-1/4	415	565	730	920	905	992	5.1	1130	1365	1615
UNJ2212GK	1-1/2	565	815	1070	1360	1175	1467	6.2	1675	2015	2380

## OVERALL DIMENSIONS

UT2155GK - UT2168GK - UT2178GK

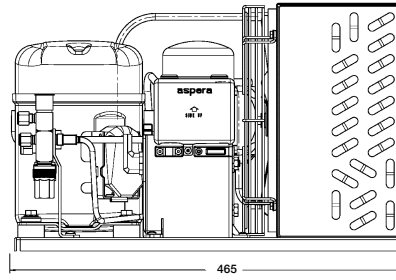

UNJ2192GK - UNJ2212GK

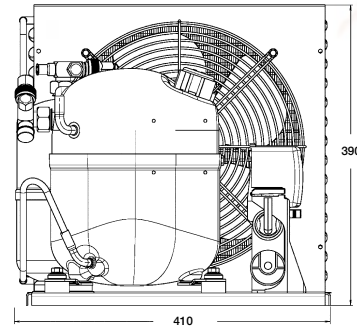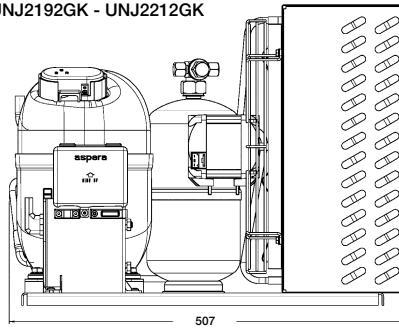

NTS (mm)  
Accessories not shown

## TECHNICAL DATA:

MODEL	COMPRESSOR					CONDENSER			RECEIVER	CONNECTIONS		Weight (kg)
	Model	Disp. (cc)	Motor Type (1)	RLA Amps	LRA Amps	Airflow l/sec	Fan Motor (2)		Capacity (kg) (3)	Comp Suct Valve	Receiver Outlet Valve	
							Watts	Amps				
UT2155GK	T2155GK	14.5	CSR	2.6	20.0	161	16	0.58	1.09	3/8"M.FI	1/4"M.FI	26.9
UT2168GK	T2168GK	17.4	CSR	3.3	18.0	161	16	0.58	1.09	3/8"M.FI	1/4"M.FI	27.6
UT2178GK	T2178GK	20.4	CSR	3.9	21.0	161	16	0.58	1.09	3/8"M.FI	1/4"M.FI	27.7
UNJ2192GK	NJ2192GK	26.0	CSR	4.9	26.0	236	34	0.84	2.09	1/2"F.Sw	3/8"F.Sw	33.5
UNJ2212GK	NJ2212GK	34.4	CSR	6.1	36.0	194	34	0.84	2.09	1/2"F.Sw	3/8"F.Sw	33.5

### NOTES:

1. All compressors are "air over motor" type
2. Compressors and fan motors are 220-240/1/50
3. Receiver storage capacity is 90% full for R404A @32°C
4. All units suitable for both capillary (with receiver removed) and T.X valve applications
5. Pictured unit configuration subject to change and selected accessory options.

The company reserves the right to make specification changes without notice. 17/08/09