

## Air Cooled Condensing Units



- Embraco aspera compressors - world renowned reliability
- Alkyl Benzene compressor lubricant
- Standard units (without accessories) are prewired to a terminal box
- Built for Australasian conditions

# R22


 Medium / High

1/5 1 3/4 hp

### CAPACITY (Watts) @ 32°C Ambient

MODEL	Nom. hp	Evaporating Temp °C								
		-15	-10	-5	0	5	7.2		10	
						Input W	Watts	RLA		
UNB6152E	1/5	308	372	442	517	605	355	645	2.2	698
UNE6181E	1/4	442	547	663	784	909	530	969	3.1	1030
UNE6210E	1/3	519	651	791	942	1093	600	1166	3.4	1262
UNE9213E	3/8	663	829	1000	1198	1390	775	1483	3.6	1650
UT6217E	1/2	791	1012	1244	1488	1744	800	1860	3.6	2017
UT6220E	5/8	942	1221	1500	1788	2093	1090	2227	4.6	2407
UNJ9226E	3/4	1221	1552	1895	2250	2605	1230	2785	5.8	2965
UNJ7228F	1.0	1337	1674	2058	2442	2837	1380	3023	6.5	3256
UNJ9232E	1-1/4	1901	2279	2680	3140	3628	1470	3860	7.9	4163
UNJ9238E	1-1/2	2373	2845	3345	3918	4528	1970	4818	9.9	5196
UNJ7240F	1-3/4	2442	2907	3465	4070	4733	2150	5035	10.7	5407

**DIMENSIONS:**

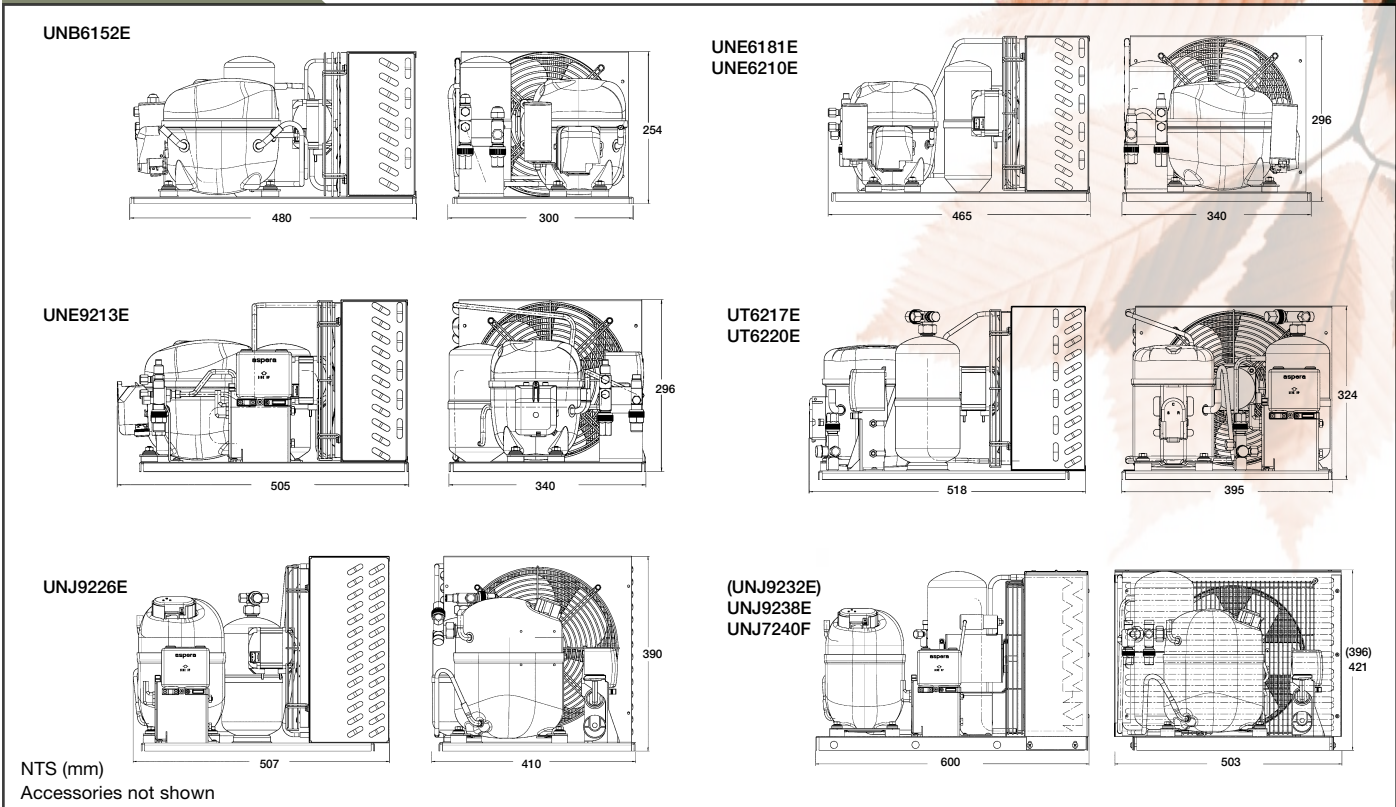

**TECHNICAL DATA:**

MODEL	COMPRESSOR					CONDENSER			RECEIVER	CONNECTIONS		Weight (kg)
	Model	Disp. (cc)	Motor Type (1)	RLA Amps	LRA Amps	Airflow l/sec	Fan Motor (2)		Capacity (kg) (3)	Comp Suct Valve	Receiver Outlet Valve	
							Watts	Amps				
UNB6152E	NB6152E	4.9	CSIR	2.1	12.0	67	10	0.30	0.52	3/8" M.F.I	1/4" M.F.I	16.0
UNE6181E	NE6181E	7.4	CSIR	3.1	13.2	150	16	0.58	1.05	3/8" M.F.I	1/4" M.F.I	20.0
UNE6210E	NE6210E	8.9	CSIR	3.4	14.0	172	16	0.58	1.05	3/8" M.F.I	1/4" M.F.I	21.0
UNE9213E	NE9213E	12.0	CSR	3.6	13.3	150	16	0.58	1.26	3/8" M.F.I	1/4" M.F.I	22.5
UT6217E	T6217E	14.5	CSR	3.6	18.0	167	34	0.84	2.41	1/2" F.Sw	3/8" F.Sw	33.0
UT6220E	T6220E	17.5	CSR	4.6	20.0	167	34	0.84	2.41	1/2" F.Sw	3/8" F.Sw	34.0
UNJ9226E	NJ9226E	21.7	CSR	5.8	27.5	236	34	0.84	2.41	5/8" F.Sw	3/8" F.Sw	35.0
UNJ7228F	NJ7228F	23.8	CSR	6.5	26.5	236	34	0.84	2.41	5/8" F.Sw	3/8" F.Sw	36.0
UNJ9232E	NJ9232E	26.2	CSR	7.9	27.5	306	60	1.10	4.19	5/8" F.Sw	1/2" F.Sw	46.0
UNJ9238E	NJ9238E	32.7	CSR	9.9	36.0	333	60	1.10	4.19	5/8" F.Sw	1/2" F.Sw	46.0
UNJ7240F	NJ7240F	34.4	CSR	10.7	43.0	333	60	1.10	4.19	5/8" F.Sw	1/2" F.Sw	46.0

**NOTES:**

1. All compressors are "air over motor" type
2. Compressors and fan motors are 220-240/1/50
3. Receiver storage capacity is 90% full for R22 @32°C
4. All units suitable for both capillary (with receiver removed) and T.X valve applications
5. Pictured unit configuration subject to change and selected accessory options.

The company reserves the right to make specification changes without notice. 15/10/09